

February 21, 2017




## AC Chassis Jack with Switch CSA/UL

### SPECIFICATION:

Current Rating: 250V AC 10A  
 Contact Resistance: 30mΩ Max.  
 Insulator Resistance: 100MΩ Min. at DC 500V  
 Dielectric withstand Strength test: 2000VAC / 1 minute  
 between each terminals  
 Insertion and Removal force: 5 ~ 40N  
 Operating Temperature: -45°C~+105°C  
 Electrical Life: 5000 cycles Min.

### Material:

Insulator: PBT UL 94V-0 or PA66/PC UL 94V-0  
 Terminal: Brass ,plating Ni.

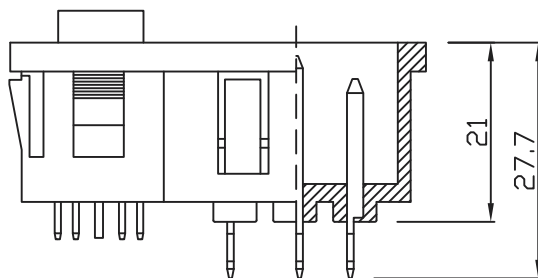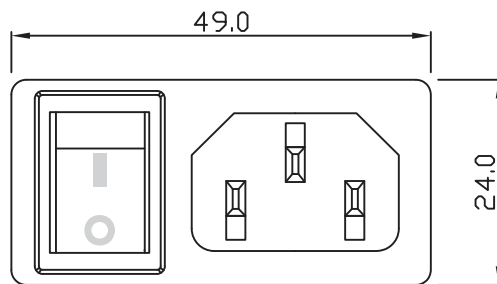

**31-047-0 Bulk**  
**31-047-0 Disp. Pkg.**