



UL
APPROVED
 E149474

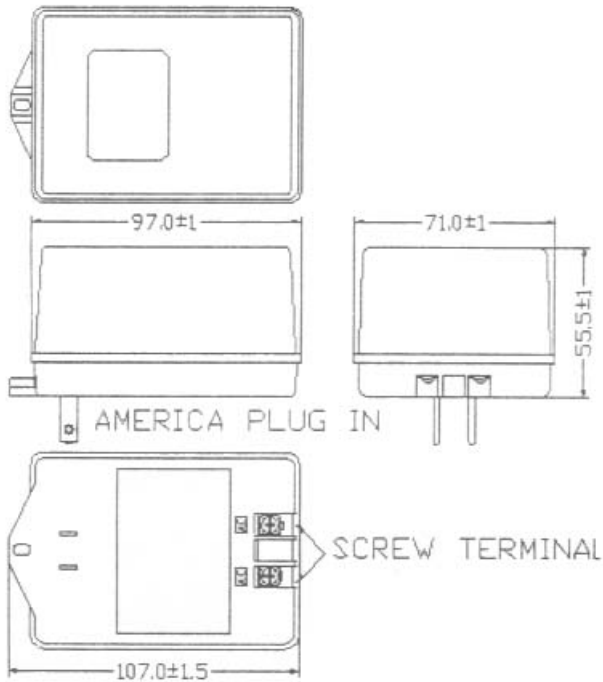

Input: AMERICA PLUG (2PIN)
 Output: SCREW TERMINAL

Electrical Circuit

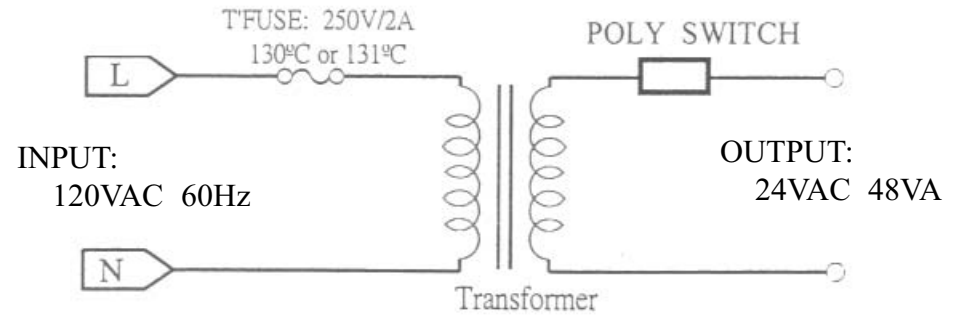

Electrical Specification

Input:
 Voltage: 120V
 Frequency: 60Hz
 Power: 48VA

Output:
 Voltage: 24.0VAC ± 5%
 Current: 1.67A
 Power: 40VA
 Voltage Without Load: 27.5VAC ± 5%
 Exciting Current with no Load: 90mA Max
 Exciting Current with Full Load: 460mA Max

Mechanical Specification

Dimension (LxWxH): 97.0 x 71.0 x 55.5 mm
 Weight: 715 g
 Operating Temperature: -10°C - 40°C
 Storage Temperature: -20°C - 70°C
 Relative Temperature: 40°C ± 2°C
 Relative Humidity: 90% RH

TITLE		SCALE
AC/AC ADAPTOR (24V)		NTS
DRAWING NO.	68-241AS	
		UNITS mm
FILE NAME	68-241AS.pdf	SHEET 1/1



Mode Electronics Part Number 68-241AS-1