


UNC #4-40 Hexscrew

M/M GENDER CHANGER

PIN OUT: 25Male

25Male

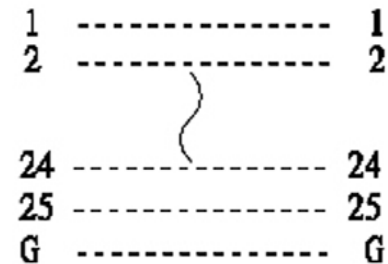

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 CLASS. OFFICE

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 VO

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C—+105°C

TITLE		SCALE
RS232 GENDER CHANGER		NTS
DRAWING NO.	32-027	
		UNITS mm
FILE NAME	32-027.pdf	SHEET 1/1